


**Putzmeister**

# Stationary concrete pump

# BSA 1409 D

Output up to 97 m<sup>3</sup>/h  
Delivery pressure up to 106 bar

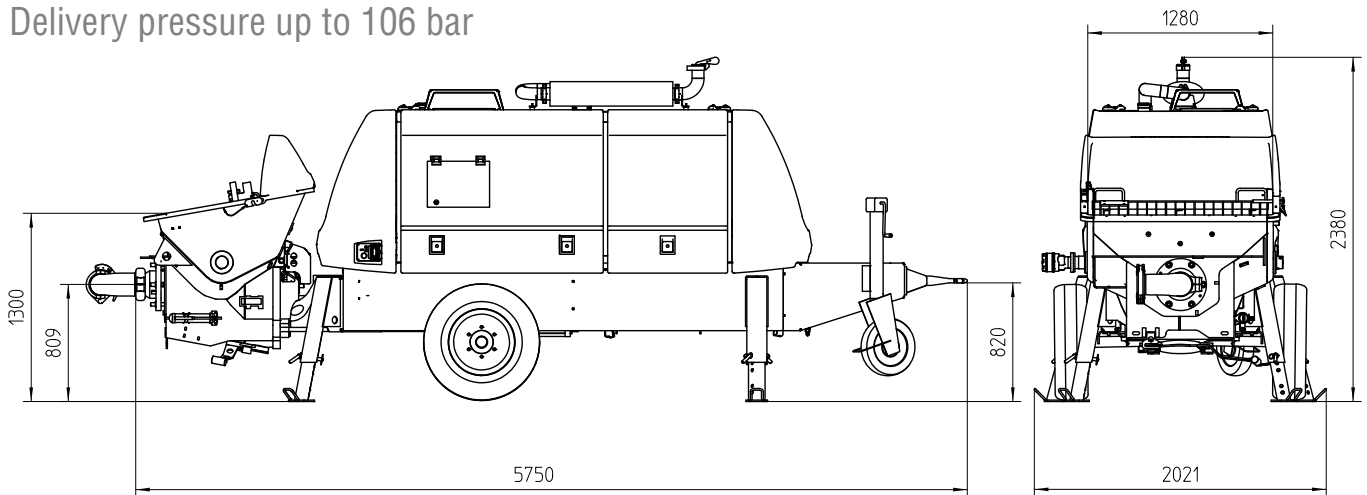

Note: Standard version. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

## Technical data

|                      |                   |             |
|----------------------|-------------------|-------------|
| Model                |                   | BSA 1409 D  |
| Material number      |                   | 102348.000  |
| Output               | m <sup>3</sup> /h | 97 / 67*    |
| Delivery pressure    | bar               | 71 / 106*   |
| Delivery cylinder    | Ø mm              | 200         |
| Delivery cyl. stroke | mm                | 1400        |
| Strokes / minute     |                   | 37 / 25*    |
| Engine power         | kW                | 140         |
| Hopper               |                   | RS 909      |
| Capacity             | l                 | approx. 600 |
| Filling height       | m                 | 1.3         |
| Transfer tube        |                   | S 2015 D    |
| Line connection      | mm                | SK 125      |
| Pressure connection  | "                 | 5.5         |
| Control system       |                   | EPS FFH     |
| Weight               | kg                | 4500        |

\* Values for hydraulic fluid being fed to piston-side  
All data maximum theoretical

## Serial equipment

|  |   |
|--|---|
| Agitator safety switch off   | Gate valve connection                                   |
| Cable remote control 10 m  | Grill 70 mm   |
| Central lubrication on hopper with hand lever press                                  | Operating manuals (1× paper, 1× CD-ROM) spare part list |
| Cleaning accessories   | Outriggers 4× mech.                                     |
| Coloring:<br>Pump, frame, roof, tank and hood anthracite-grey<br>Cover chrome yellow | Pump flow meter   |
| Concrete hopper with agitator  | Reduction bend 90°;<br>SK 150 → SK 125                  |
| Concrete output adjust   | Speed drawdown automatically on pump stop               |
| Concrete pressure adjust   | Splash guard  |
| Coupling ring (DIN)  | Support wheel   |
| Drive diesel, Deutz 140 kW   | Tool set incl. standard equipment                       |
| Electronic error management  | Trailer F8, travelling in site                          |
| Ergonic Graphic Display (EGD)  |   |
| Flushing water pump 50 l/min 20 bar  |   |

See quotation for exact serial delivery scope.  
Comprehensive range of options available on request.