



Concrete pump

BSA 2109 HPD

Output up to 84 m³/h
 Delivery pressure up to 205 bar

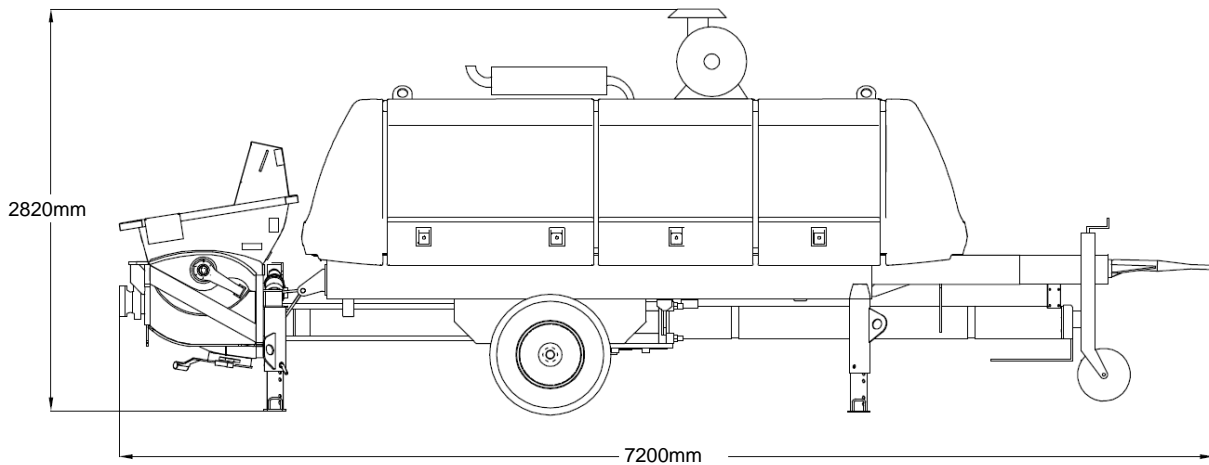

Performance diagram

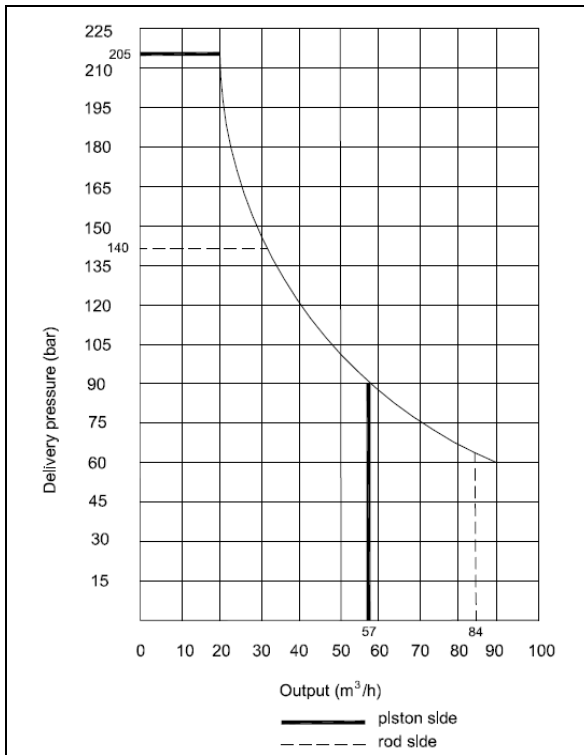


Technical data for concrete pump

Model		BSA 2109 HPD
Output	m ³ /h	84/57*
Delivery pressure	bar	140/205*
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	2100
Strokes / minute		21/14*
Drive power	KW	220
Hopper Capacity	L	RS 905 HC aprox. 600
Filling height	m	aprox. 1.2
Transfer tube		S 2015 N
Pressure connection	Ømm	150
Control system		FFH

*Values for hydraulic fluid being fed to piston side.

All data maximum theoretical

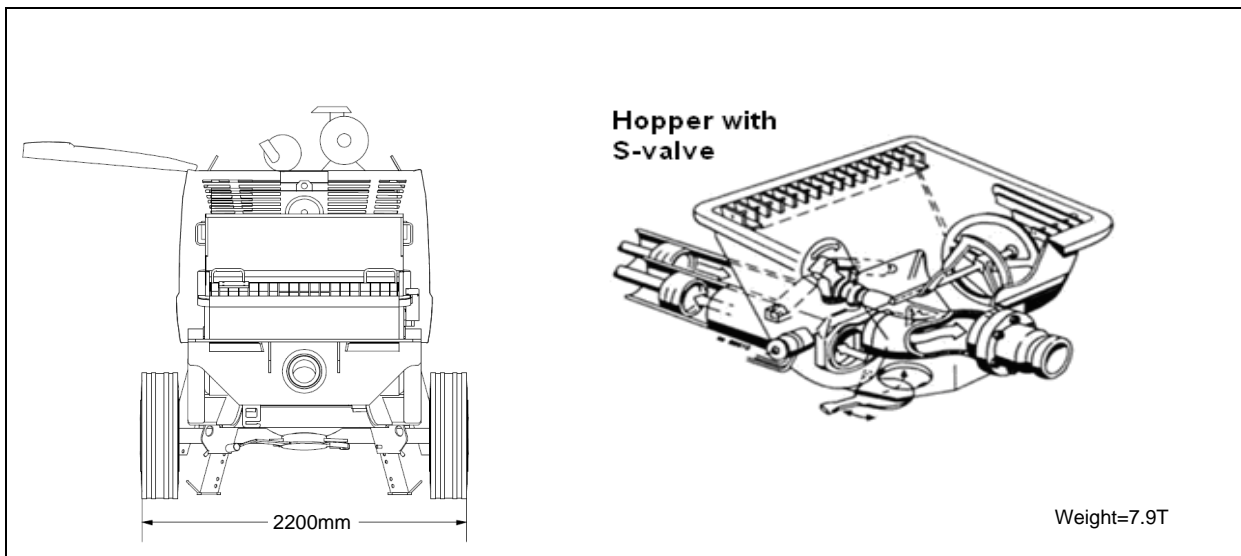

Scope of delivery

Standard / Optional Extras

- Drive diesel motor 220KW.
- Hopper with agitator
- Operating manuals and spare part lists 2x
- Trailer F 8, travelling on site
- Centralized greased lubrication with hand pump
- Grille 70 mm
- Splash guard
- Mechanical jack with support wheel
- Cast wear parts, highly wear resistant
- Square outriggers 4x mech.15°-slanting
- SBU
- Hopper grate safety cutout (RSA)
- Flushing water pump, 22 bar, easy for operation
- Cable remote control
- Rubber collar for hopper

Please see quotation for exact delivery scope

Putzmeister Concrete Machines Pvt. Ltd. Plot No. N4, Phase IV, Verna Industrial Estate, Verna Salcete, Goa-403 722, India

Tel- +91 832 669 6000, Fax - +91832 669 6300, Website – www.pmw.co.in

For all your support needs, contact - **Sales – sales@pmw.co.in Service – aps@pmw.co.in**